Data sheet - Ariston Washer and Dryer (120V)

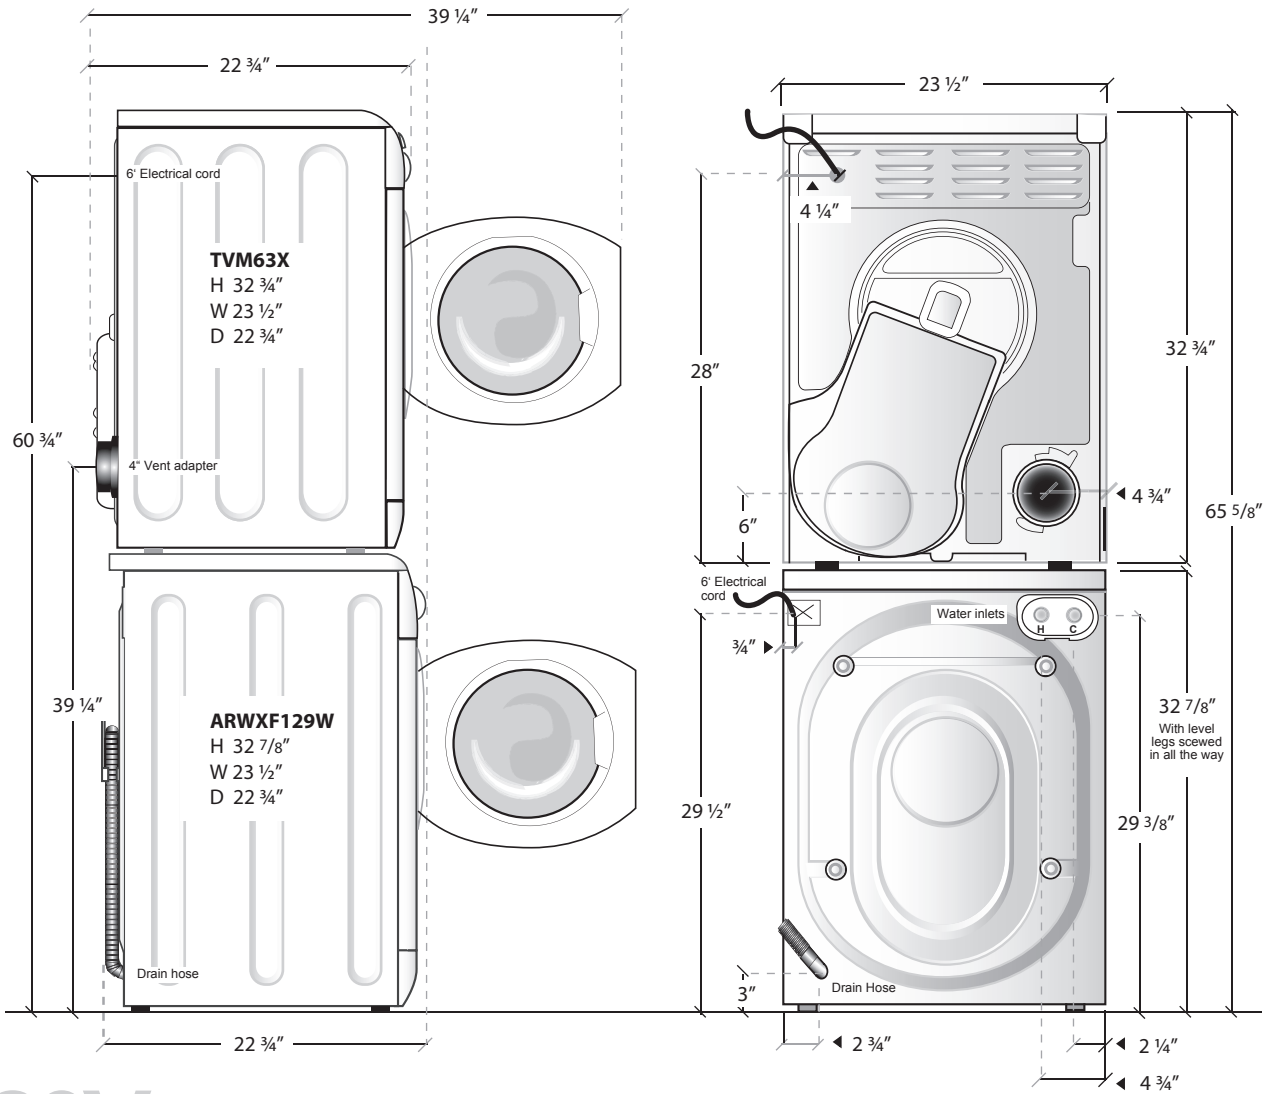

Min. cutout dimensions

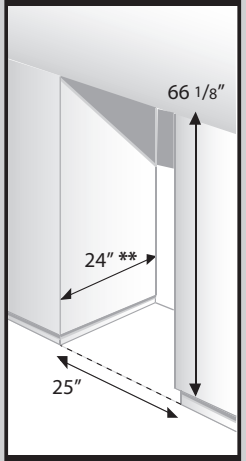

NOTE: Allow space for easy servicing and removal. Always refer to installation instructions that come with the units for complete instructions.

Suggested shelf installation

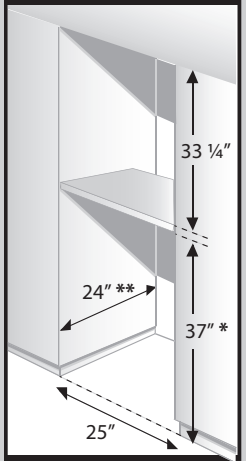

TIP: When installing the dryer on a shelf above the washer, leave space behind the shelf (or leave an access hole) so the dryer ducting can be connected before the washer is slid into its' final installation location (see NOTE, left)

*6" has been added to this dimension for easy access to water shut-off valves.
** Min. dimension shown. Dimension may increase depending on standpipe location.

Included with ARWXF129W washer



2 Water inlet hoses | Electrical conn. | Flexible drain hose (5' length) | Drain hose u-clamp

Optional accessories

- PI22 Drain-A-Way pan
- 154187104A Faucet adapter kit
- 1005 All-natural HE laundry powder

RV/Marine installation accessories

- VID403A/AC deluxe vent kit
- MK01 SecureFit brackets
- SK02 RV/Marine stack kit
- VI490D 90° dryer vent elbow



120V

Product model numbers

ARWXF129W Front-loading Washer | **TVM63X 120V Dryer**

Installation location requirements
- Recessed area, closet, or alcove.
- Solid, level floor. Must support 280 lbs. min.
- Towable trailer/watercraft: position over axles/midship. Block in to prevent extreme movement.

c UL us LISTED

Min. clearances (from case)
ARWXF129W: 0″ sides, 1″ front/back
TVM63X: Standard ½″ top, ¾″ sides/rear/front (alternative - 4″top, 0″ sides, ¾″ rear/front)
NOTE: Allow additional clearances for easy maintenance and removal

Electrical requirements
ARWXF129W: 120V/60Hz/460W/4amp*)
TVM63X: 120V/60Hz/12amp*
(*15amp seperate circuit recommended)

Standpipe Drain System Req:
- Min 1 ¼″ diameter standpipe with 7 GPM carry-away capacity
- Distance from bottom of washer to top of standpipe: 25″ min./34″max.
- Min. distance from bottom of washer case to outlet end of drain hose: 20″
- Air break required to avoid siphoning

Dryer exhaust requirements:
- DO NOT exhaust into chimney, furnace, cold air duct, attic, crawl space, or another duct used for venting
- Two, 72 square-inch ventilation openings req. if using a closet door. Louvered doors with equiv. air openings are acceptable. Allow clearance for knobs, buttons, cabinet moldings, etc.
- Rigid or flexible metalic duct required (not included). Ducting must slope downwards and away from the machine.

Never reuse data sheets. Data sheets are subject to change without notice. Never use data sheets for final installation criteria.
For complete installation information, refer to the owners manual that comes with the unit (also available upon request).